elitra LED Machine Light

502000140 MLe Compact Diff-O-M8-40

Technical Data

Power supply:	4 Watts
Connected load:	24V DC (-10% / +15%)
Connection type:	M8 plug connector with 4 pins, A-coded
Casing material:	anodised aluminum
Protection type:	IP 67
Protection class:	III
Lamp cover:	4mm diffuse PMMA
Max. ambient temperature:	50°C
Mounting:	rigid
Max. screw head diameter:	7.5 mm / M4
Construction:	add-on version
Light distribution:	direct, wide beam
Light colour:	neutral white, approx. 4000 K
Colour rendering (Ra):	>80
Dimensions:	Length= 120 mm, width= 25 mm
Weight:	approx. 0.130 kg
Special features:	
Luminous flux:	approx. 420 lm
Luminous efficiency:	approx. 105 lm/W
Beam angle:	>120°
Equipment:	LED energy efficiency class A+
Operating unit:	without

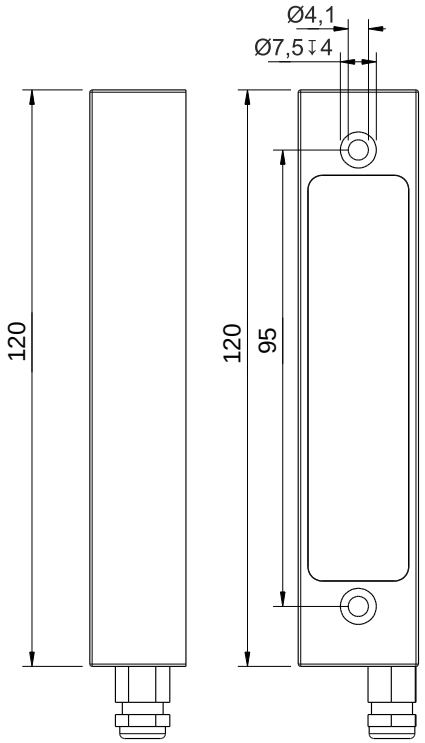



Illuminances
Measuring distance: 50 cm

Em:	**179 lx**
Emax:	462 lx
Emin:	48 lx

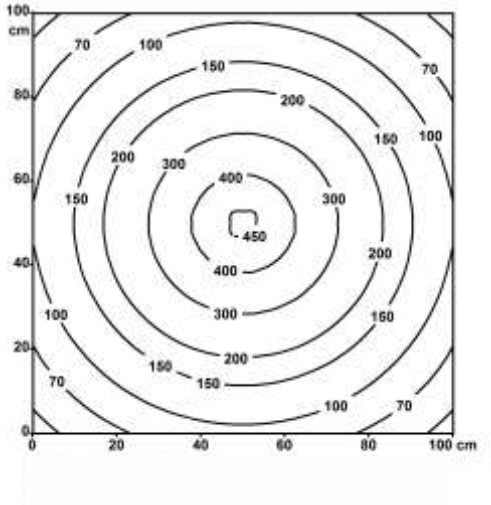

Technical modifications and errors reserved. Illustrations may differ from the original. Luminous flux and light colours may vary.