


**Technical Data**


Power supply:	6 Watts
Connected load:	24V DC (-10% / +15%)
Connection type:	3 meters cable
Casing material:	anodised aluminum
Protection type:	IP 67
Protection class:	III
Lamp cover:	4mm diffuse PMMA
Max. ambient temperature:	50°C
Mounting:	rigid
Max. screw head diameter:	- / M6
Construction:	add-on version
Light distribution:	direct, wide beam
Light colour:	daylight white, approx. 5500 K
Colour rendering (Ra):	>80
Dimensions:	Length= 210 mm, width= 50 mm
Weight:	approx. 0.560 kg
Special features:	
Luminous flux:	approx. 630 lm
Luminous efficiency:	approx. 105 lm/W
Beam angle:	> 120°
Equipment:	LED energy efficiency class A+
Operating unit:	without

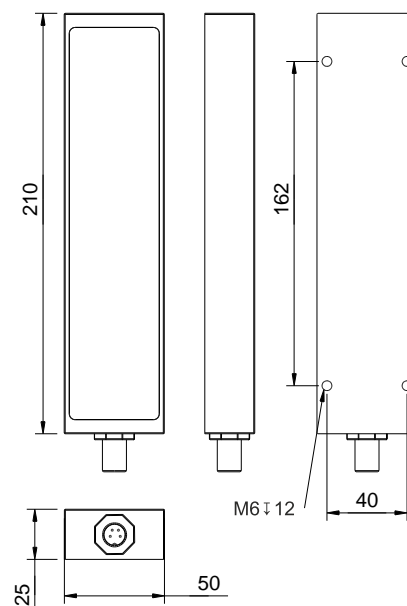

**Illuminances**

Measuring distance: 50 cm

**Em:** 283 lx  
**E<sub>max</sub>:** 708 lx  
**E<sub>min</sub>:** 77 lx

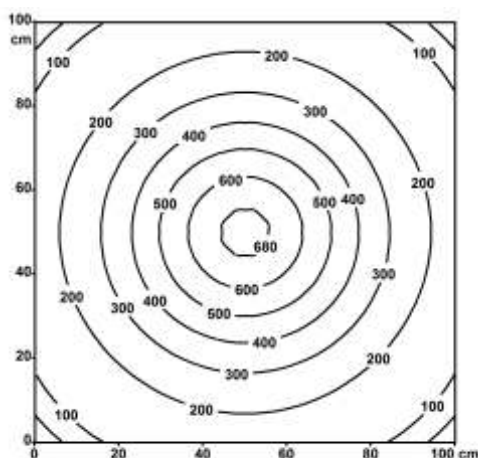

**Illuminances**

Measuring distance: 100 cm

**Em:** 155 lx  
**E<sub>max</sub>:** 215 lx  
**E<sub>min</sub>:** 91 lx

